



# CE1200LSWR / CE600LSWR ELECTRO-MAGNETIC GATE LOCK

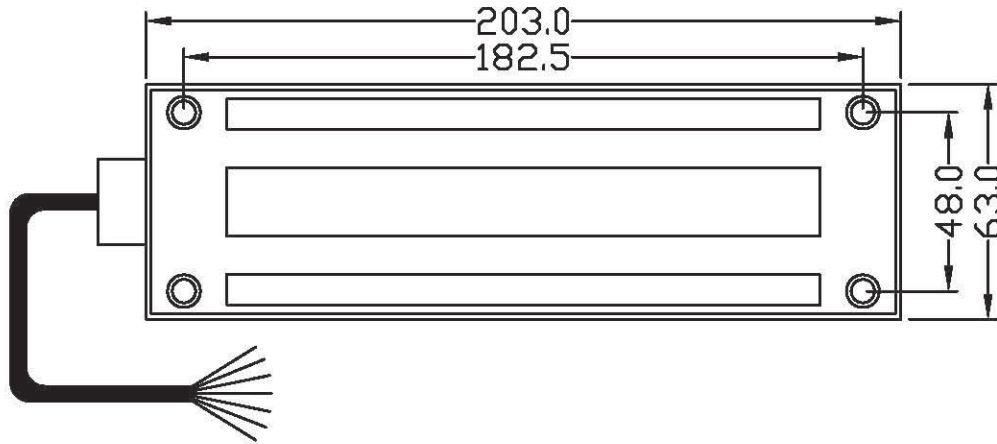

MODEL  
CE1200LSWR

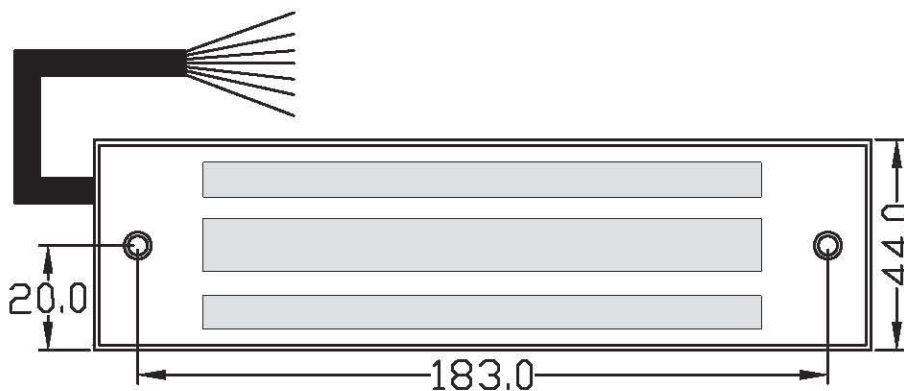

MODEL  
CE600LSWR

**WIRING INSTRUCTION: READ CAREFULLY**

- (1) For 12V: Connect the red/black wires, green/orange wires and connect 12V source.
- (2) For 24v: Short black/green wires and connect red and orange ones to 24V source.
- (3) Reed switch dry contacts are rated max 3W(max switching contact 0.25A) at 30VDC/AC for safe operation. Do not exceed this rating.
- (4) Lock status sensor: CE1200LSWR/FAS-CE600LSWR

12V	24V	LOCK STATUS SENSOR
+ — Red — Black — Green — Orange	+ — Red — Black — Green — Orange	

Picture	Quantity 1200/800	Specification	1200 SERIES	600 SERIES
	1/0	ALUM SPACER 43L*160D*12.81Dmm	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	1/0	ALLEN KEY 5mm	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	2/2	STEEL WASHER 22mm DIA	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	1/1	ARMATURE BOLT RECEIVER M8*41mm	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	1/1	ARMATURE BOLT M8*45mm W/RUBBER	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	2/2	GUIDE PIN 5*16mm	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	4/0	M6*35mm FIXING SCREW (NYLOCKED)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	1/1	TNR330	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	1/1	RUBBER WASHER 15 (D0)*9 (I1)*4 (D1)mm	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	4/4	STEEL WASHER 10mm DIA	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	4/2	Rubber T=6mmD=10.5	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	0/2	M6*35mm FIXING SCREW (NYLOCKED)	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	0/2	NUT 6mm	<input type="checkbox"/>	<input checked="" type="checkbox"/>